




Ready For More. Every™ Ton.

QSK78 Engines For Mining Applications.

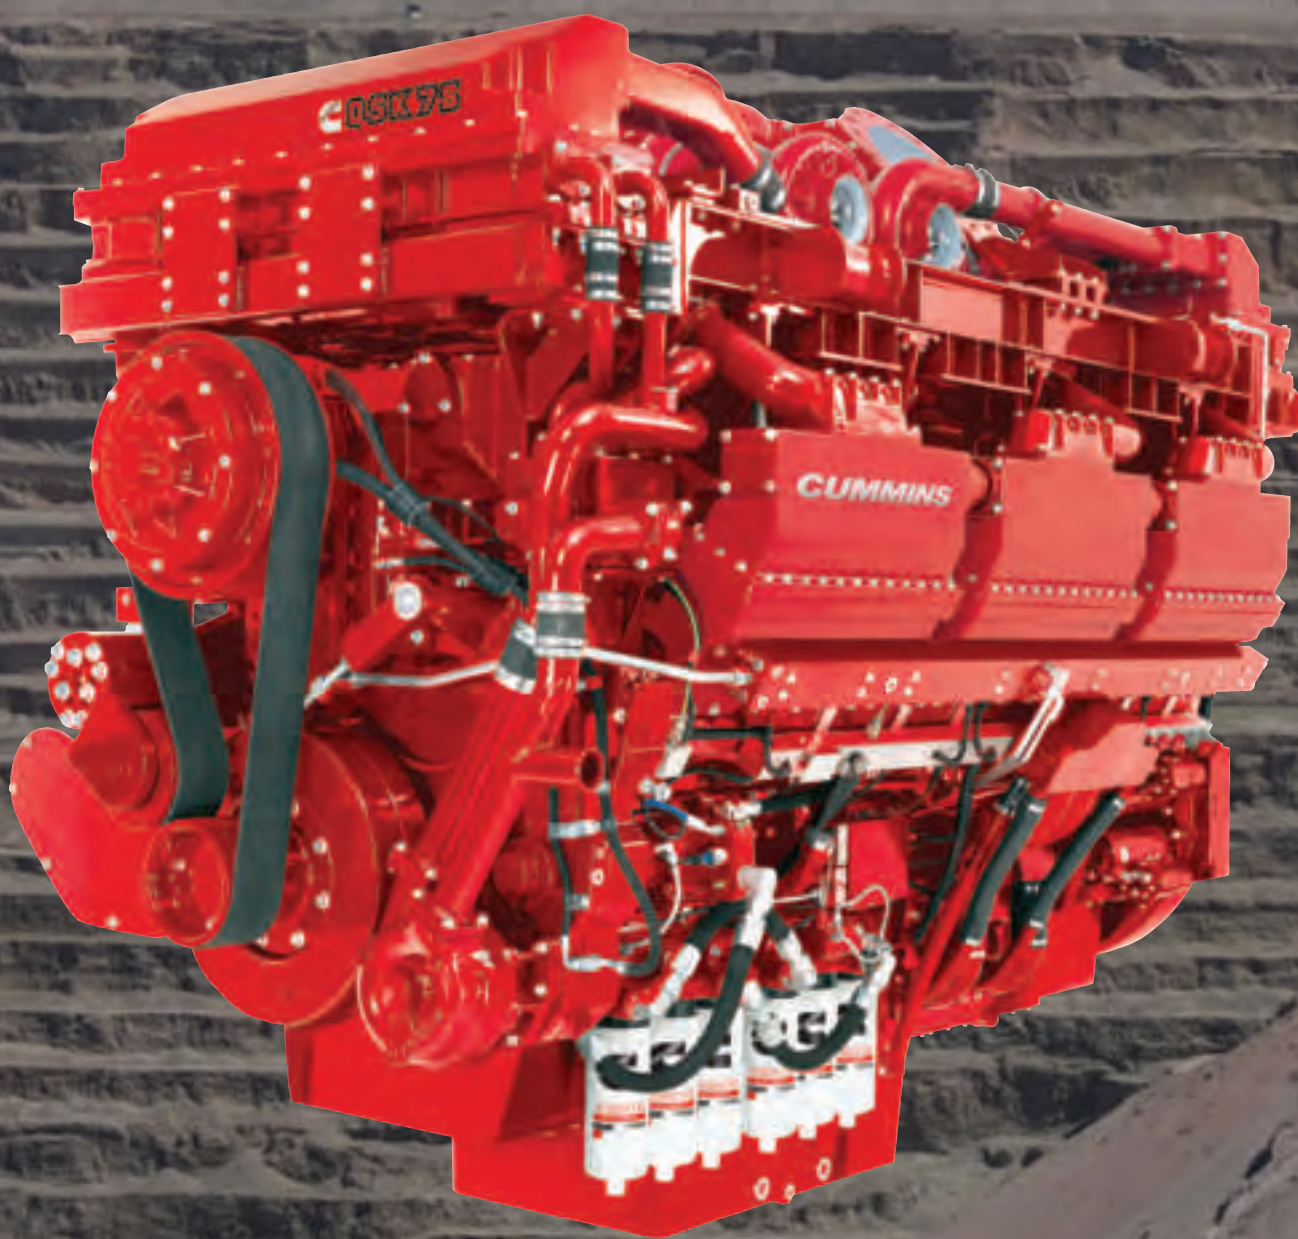

QSK78.

More Innovation.

Over the years, we've taken the proven QSK system design and developed an innovative package of upgraded components with stronger capabilities and a more robust design to achieve more productivity and reliability with the QSK78 – while simultaneously offering innovative technology solutions to meet emissions standards.

More Robust Features.

- A forged high-strength tensile steel crankshaft with dual viscous dampers reduces gear train wear, and tungsten counterweights provide vibration damping for long engine and equipment life
- The High-Pressure Injection fuel system (HPI) provides optimum combustion for low emissions and better fuel economy
- The ELIMINATOR™ self-cleaning filtration system combines full-flow and bypass filters with an oil pressure-powered centrifuge; stainless steel filter screens trap particles as small as 20 microns while the centrifuge removes particles as small as 2 microns

More Performance.

The bigger they are, the harder they haul. With a peak horsepower of 3500 hp (2610 kW) at 1900 rpm and peak torque in excess of 10,000 lb-ft (13,000 N•m), the Cummins QSK78 meets the power needs of the world's largest class of haul trucks.

Cummins QSK78 incorporates the best features of our QSK Series engines, including full-authority electronic controls to achieve exceptional combustion efficiency. Extended service intervals help eliminate downtime for routine maintenance. With optimized maintenance schedules and advanced combustion efficiency, the QSK78 delivers the lowest cost-per-ton of any engine in its class.

Ratings

ENGINE MODEL*	ADVERTISED HP (KW) @ RPM	PEAK TORQUE LB-FT (N•M) @ RPM
QSK78 3500	3500 (2610) @ 1900	10,157 (13,771) @ 1500

*Cummins customers can use Tier 2 engines in North America through 2017 by utilizing U.S. EPA's Transitional Program for Equipment Manufacturers. All QSK78 ratings are available for use in nonregulated regions where engines are not subject to certification.

Specifications

Engine Type	60° Vee 18-Cylinder	
Aspiration	Two-Stage Turbocharged, Intercooled and Aftercooled	
Displacement	4,735 CU IN	77.6 LITERS
Bore and Stroke	6.69 IN x 7.48 IN	170 MM x 190 MM
Oil System Capacity	304 U.S. QT	288 LITERS
Coolant Capacity	176 U.S. QT	166.6 LITERS
Length	131 IN	3,327 MM
Width	65.5 IN	1,663 MM
Height	95.6 IN	2,429 MM
Dry Weight	23,810 LB	10,800 KG
Wet Weight	25,662 LB	11,640 KG

More Confidence.

QSK78 engines are backed by the best warranty in the industry, with full coverage for unlimited hours the first year, extending through 2 years or 2,000 hours, whichever comes first. Major-components coverage continues through the third year or 10,000 hours. Extended protection plans are available.

More Support. Every Customer.

Cummins QSK78 engines are backed by the world's largest and most capable parts and service network, with over 600 authorized distributors around the globe. For more information, call 1-800-DIESELS™ (1-800-343-7357) or go to cumminsengines.com.



Cummins Inc.
Box 3005
Columbus, IN 47202-3005
U.S.A.

Phone: 1-800-DIESELS™ (1-800-343-7357)
Fax: 1-800-232-6393
Internet: cumminsengines.com

Twitter.com/CumminsEngines
YouTube.com/CumminsEngines

Bulletin 4087274 Printed in U.S.A. 8/12
©2012 Cummins Inc.